

GF120

FEATURES

Japanese Fluid Dynamic Bearing&high-quality IC to offer a super noise level

FDB

100% rubber-cover design with perfect de-vibration effect

TPE

Detachable fan impeller owned the function of recruited lubricating oil, extend the lifetime max


DIY

100,000 hours to offer a more steady working time max

MTTF



Optimized fan configuration with 3-proof(Dustproof, waterproof, oilproof)
function to own a longer lifetime

PROTECTION

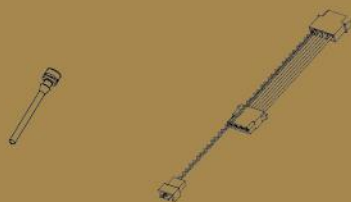

De-Vibration Buckle x 4

Low Noise Adapter(7V)

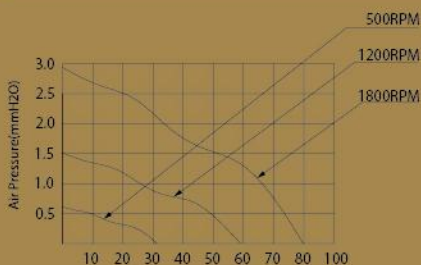

Specifications

Overall Dimension	120X120X26mm
Weight	170g
Rated Voltage	12VDC
Operating Voltage	10.8~13.2VDC
Starting Voltage	7VDC
Rated Current	0.14±10%A(MAX)
Power Input	1.68W
Fan Speed(12V)	500±200~1800±10%RPM
Fan Speed(7V)	1200RPM
Max. Air Flow(12V)	79.83CFM
Max. Air Flow(7V)	58.69CFM
Noise Level	17.6~32.5dB(A)
Bearing Type	Fluid Dynamic Bearing



P/N: DPGS-FGF-GF120BK



6 933412 712602

MADE IN CHINA

Appearance Patent No: 201430262467.4